



## PS Tapes

The Tygavac range of general purpose pressure sensitive adhesive tapes is a comprehensive range suitable for all holding, masking and flashbreaking applications encountered in a vacuum bag moulding at temperatures up to 400 °C.

This category also includes Tygavac resin release fabrics, which are non-porous PTFE glass fabrics. They can be used as a release surface or resin restrictor and will release from all commercial resin systems.

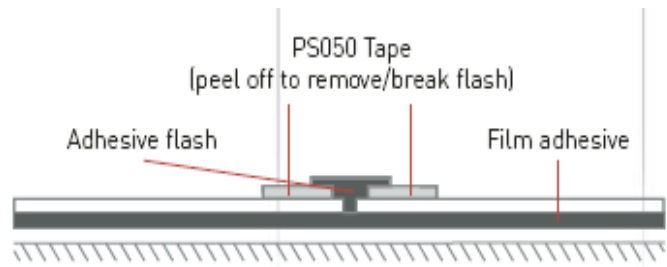

Tygavac Product	Carrier Type Thickness (µm)	Adhesive type	Maximum use temperature (°C)	Application	Width (mm)
PS025	Polyester / 25	Fully cured Silicone	205	Holding / masking	25, 50
PS050	Polyester / 50	Fully cured Silicone	205	Holding / masking Flashbreaking	25, 50
PS125	Polyester / 125	Fully cured Silicone	205	Flashbreaking	25, 50
PDA025	Polyester / 25	Acrylic / double sided	205	Holding	25, 50
HC10	Fabric / 300	Rubber resin	100	Holding down Honeycomb during machining	50
KS700	Polyimide / 25	Fully cured Silicone	400	Holding / masking	25, 50
TF__AH	PTFE / 75 - 500	Silicone	200	Tool release	10 - 500
TFG__AH	PTFE / 75 - 250	Silicone	260	Tool release	10 - 1000

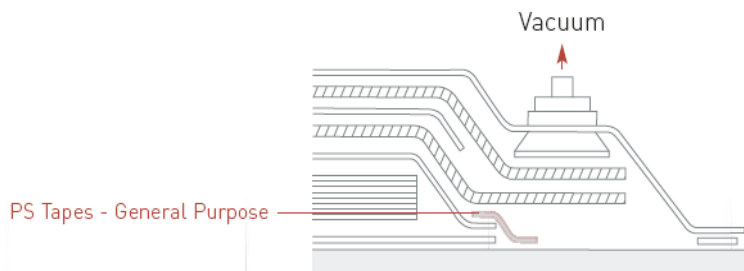

All statements, technical information and recommendations contained in this publication are based on tests believed to be reliable, but their accuracy and/or completeness are not guaranteed. The user shall determine the suitability of the product for his particular purpose and shall assume all risk and liability in connection therewith. All products are sold subject to Tygavac Advanced Materials standard conditions of sale.

**TYGAVAC**  
 ADVANCED MATERIALS LTD  
 Tel: (01706) 649 222  
 Internet: <http://www.tygavac.co.uk>  
 E mail : sales@tygavac.co.uk

Tygavac™ is a registered trade mark  
 2006 - 16 - 10  
 Standard Catalogue