


# Vacuum Bag Sealant Tape

Tygavac Vacuum Bag Sealant Tapes are used to form a vacuum tight seal typically between the vacuum bagging film and mould tool for edge bagging and the bag film to bag film for envelope bagging. They are supplied in the form of an extruded rubber sealant strip which has the capability of forming a strong bond to a wide range of film types and tool surfaces. All of the sealant tapes offered by Tygavac have been specially developed for use in vacuum bag moulding processes.

Tygavac Product	Application	Colour	Roll size	Maximum service Temperature (°C)
DBT 101	Low temp / De-bulking	Teak	3mm x 12mm x 15m	80
LTT90B	Room / Low temp Applications	Black	3mm x 12mm x 15m	90
TV100B	Up to 100°C cure cycles	Black	3mm x 12mm x 15m	100
TV150G	Up to 150 °C cure cycles	Grey	3mm x 12mm x 15m	150
TV200Y	High tack, Multi-purpose	Yellow	3mm x 12mm x 7.6m	200
VBS 300	Up to 125°C cure cycles	White	3mm x 12mm x 15m	140
VBS 500	High tack / 195°C cure cycles	Black	3mm x 12mm x 15m	195
VBS 550	Economical / Multi-purpose	Black	3mm x 12mm x 7.6m	195
VBS 750	Ultra high temperature Thermoplastic moulding	Brown	3mm x 18mm x 10m	400

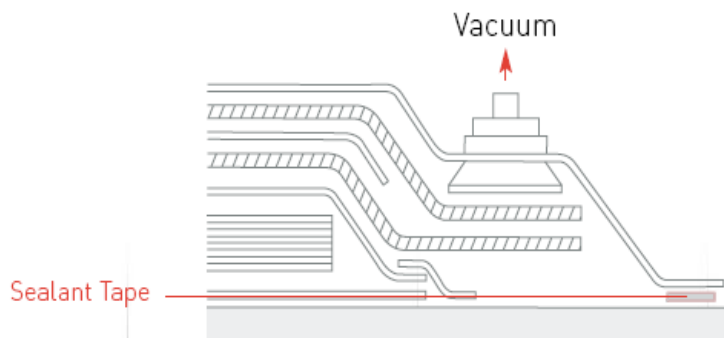

All statements, technical information and recommendations contained in this publication are based on tests believed to be reliable, but their accuracy and/or completeness are not guaranteed. The user shall determine the suitability of the product for his particular purpose and shall assume all risk and liability in connection therewith. All products are sold subject to Tygavac Advanced Materials standard conditions of sale.

**TYGAVAC**  
 ADVANCED MATERIALS LTD  
 Tel: (01706) 649 222  
 Internet: <http://www.tygavac.co.uk>  
 E mail : sales@tygavac.co.uk

Tygavac™ is a registered trade mark  
 2006 - 10 - 16  
 Standard Catalogue

VACUUM BAG SEALANT TAPE